
MBC 2500/150
MB 2500/150

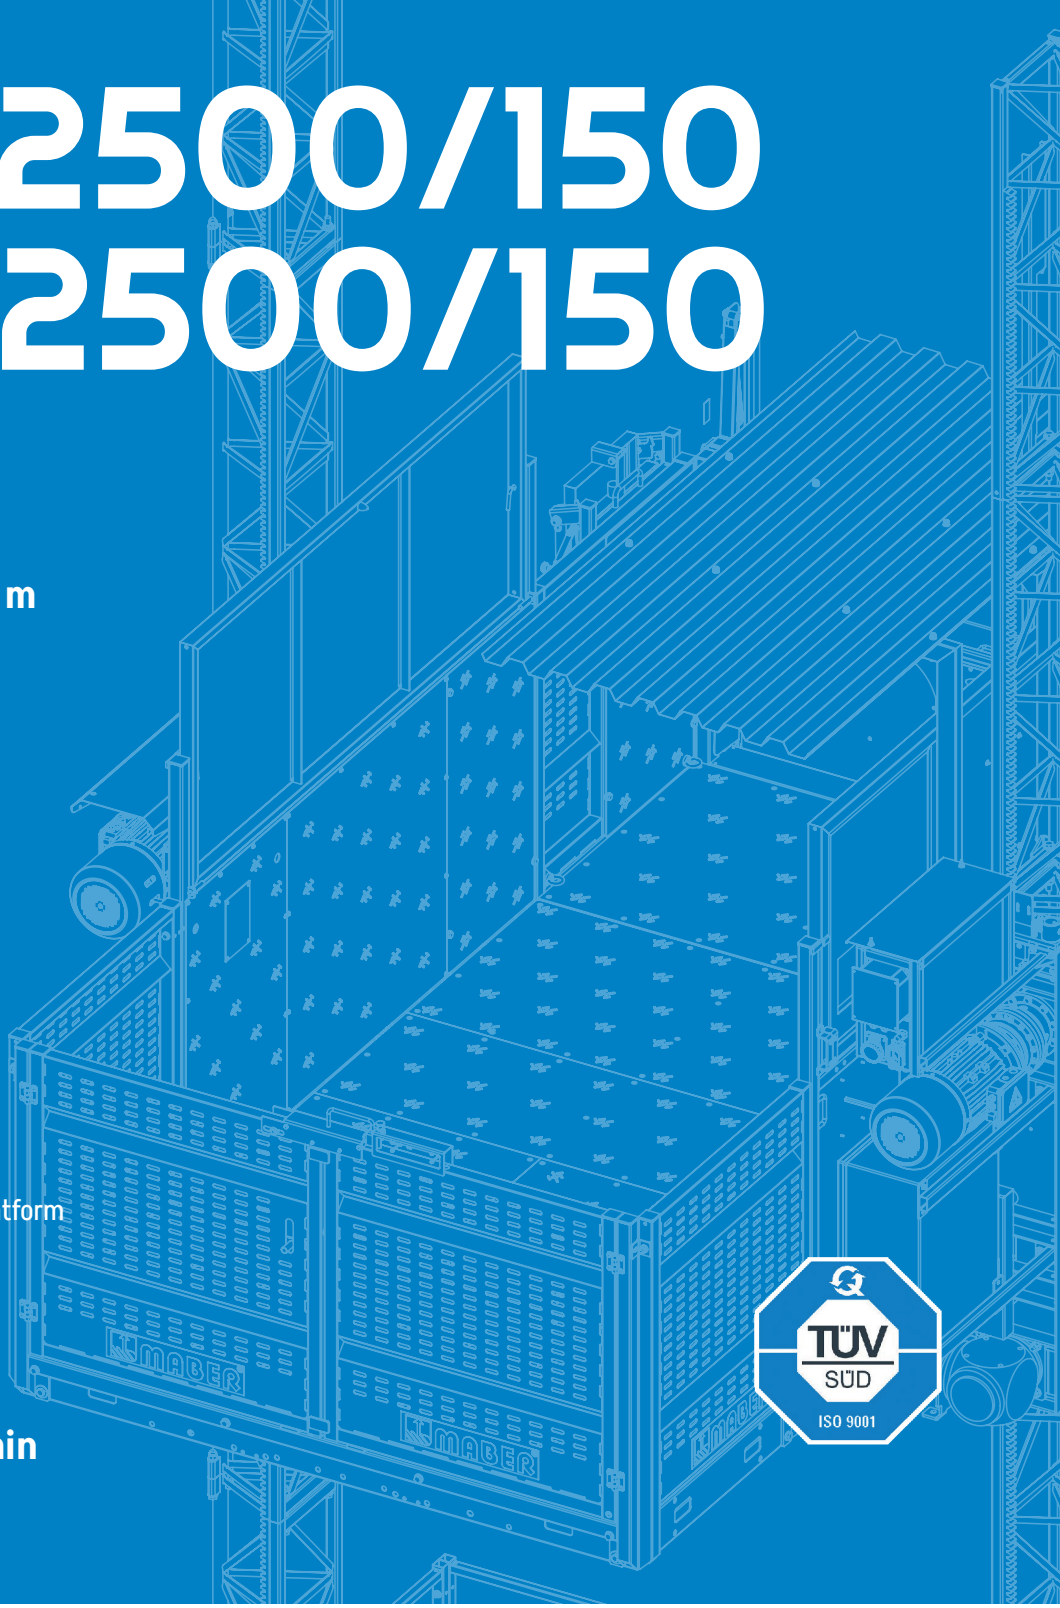

1.51 x 4.24 m

2500 kg

7 Persons
as transport platform

12-30 m/min

TÜV SÜD ISO 9001

TRANSPORT PLATFORMS

GOODS HOISTS

CONSTRUCTION HOISTS

MAST CLIMBERS

MABER®
Lifting Technologies


MADE IN ITALY SINCE 1988

TRANSPORT PLATFORM: Transport platform built in line with EN16719 are used to transport goods and personell between floors. Available in different platform sizes, voltages, types of ramps, colours and speed. Possibility to choose different accessories. Customizable for specific needs.
GOODS HOIST: Builders' hoist for goods with accessible platform built in line with EN12158-1. Available in different platform sizes, voltages, types of ramps, colours and speed. Possibility to choose different accessories. Customizable for specific needs.

MODEL	UOM	MBC 2500/150		MB 2500/150
TYPE		TRANSPORT PLATFORM	BUILDERS' HOIST FOR GOODS	BUILDERS' HOIST FOR GOODS
STANDARD OF REFERENCE		EN 16719	EN 12158-1	EN 12158-1
RATED LOAD	kg	MAX 2500 *		MAX 2500 *
MAX HEIGHT	m	150		150
TIES SPACING	m	7		7
OVERHANG	m	3		3
PLATFORM WIDTH (W)	m	1.51 *		1.51 *
PLATFORM LENGTH (L)	m	MAX 4.24 *		MAX 4.24 *
PLATFORM HEIGHT (H)	m	1.1		1.1
RUNNING SPEED	m/min	12	30	30
MOTOR POWER	kW	2 x 9.2		2 X 9.2
MAX PERSONS	No.	7	0	0
DRIVE CONTROL	Type	VFD - VARIABLE FREQUENCY DRIVE		VFD - VARIABLE FREQUENCY DRIVE
SUPPLY VOLTAGE / FREQUENCY	V/Hz	THREE-PHASE 400 / 50 **		THREE-PHASE 400 / 50 **
STARTING CURRENT	A	63		63
RCD	mA	300		300
POWER SUPPLY	kVA	45		45

* capacity/length based on loading diagram | ** different voltage/frequency available

Different configurations

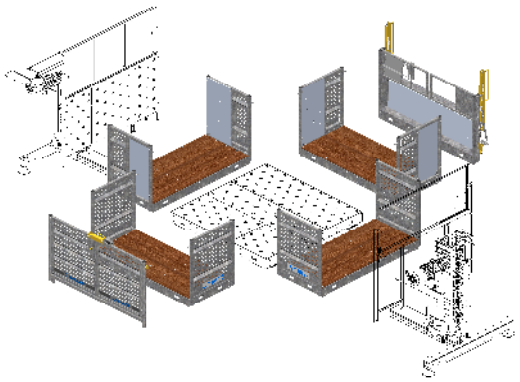

Landing Doors/Gates

SLIDING LANDING GATE




SWIVEL LANDING GATE



MAST SECTION

W = 400 mm
L = 350 mm
H = 1495 mm

WEIGHT 43 Kg



USED IN MABER MODELS:

Transport Platform: MBC 1000/150, MBC 2300/120
Goods Hoist: MB 1000/150, MB 2300/120
Mast Climber: MBA 800/150


Technical Information

TRANSPORT PLATFORM


GOODS HOISTS

CE


Transport platform mode only

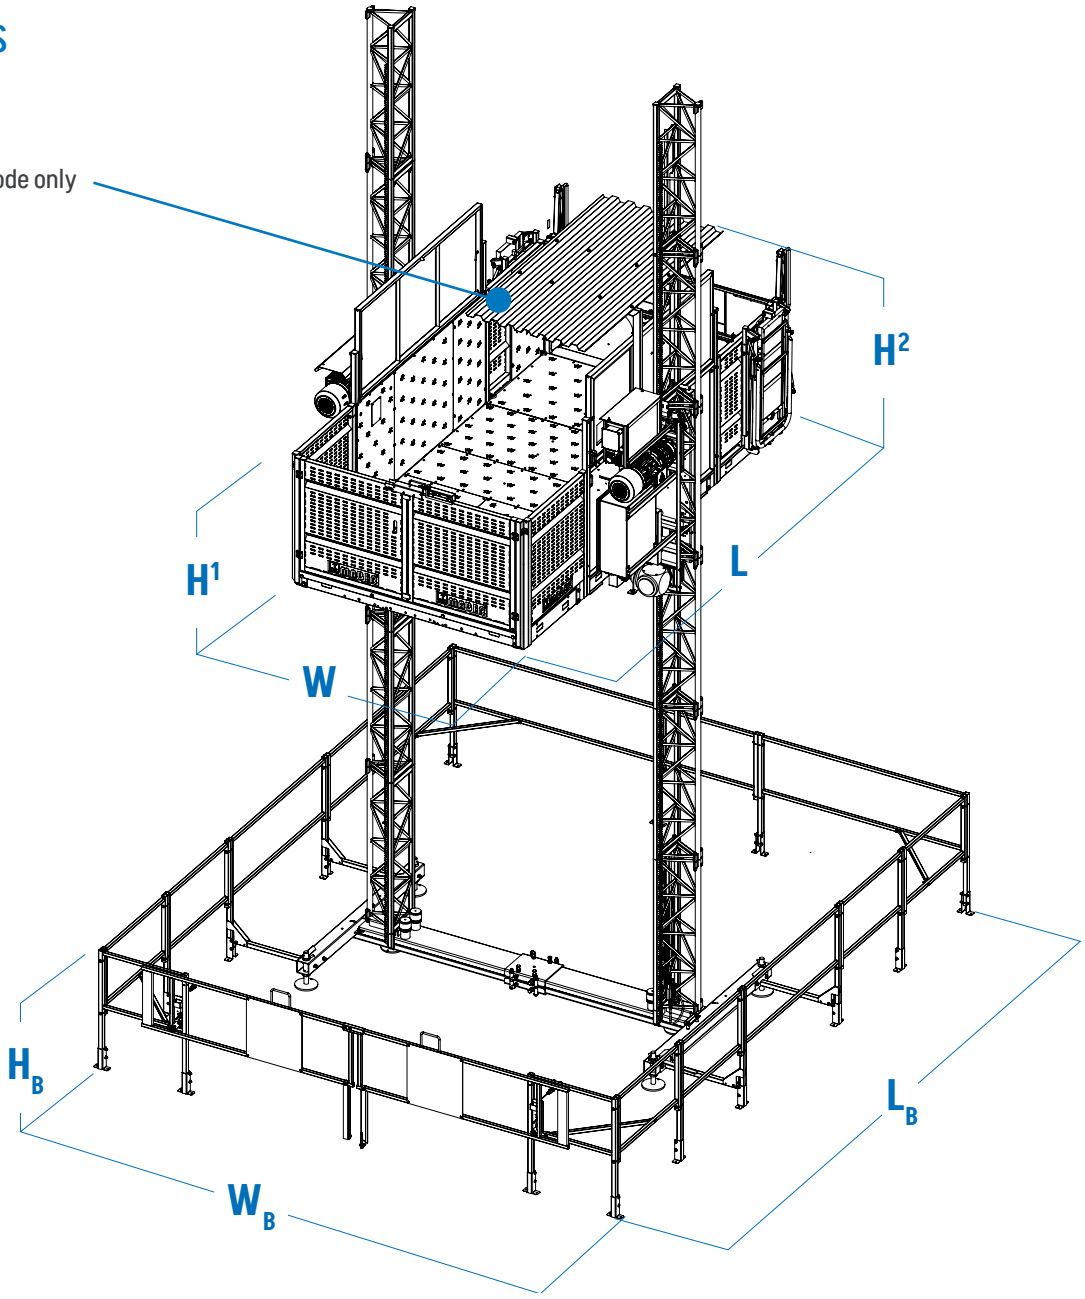


2.000 kg




2.000 kg



1.500 kg



2.500 kg



DIMENSIONS

W= 1.51 m	L= 4.24 m	H^1= 1 m	H^2= 2.0 / 2.7 m
W_B= 5.2 m	L_B= 6.2 m	H_B= 1.1 m	

FEATURES

• 2.2 m entry and exit door without height restriction • Reduced 1.1 m or 2.0 m base enclosure • Emergency brake
• Falling object protection roof (mandatory for transport platform only) • Rack lubrication pump (option)
• Certified by notified body(mandatory for transport platform only) • Overload detection device









Maber Hoist Srl
Via Dell'Industria e dell'Artigianato, 16
35010 Carmignano di Brenta (PD), Italy

+39 049 595 89 75

info@maber.eu

www.maber.eu